Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

I. OUTER DIMENSIONS :

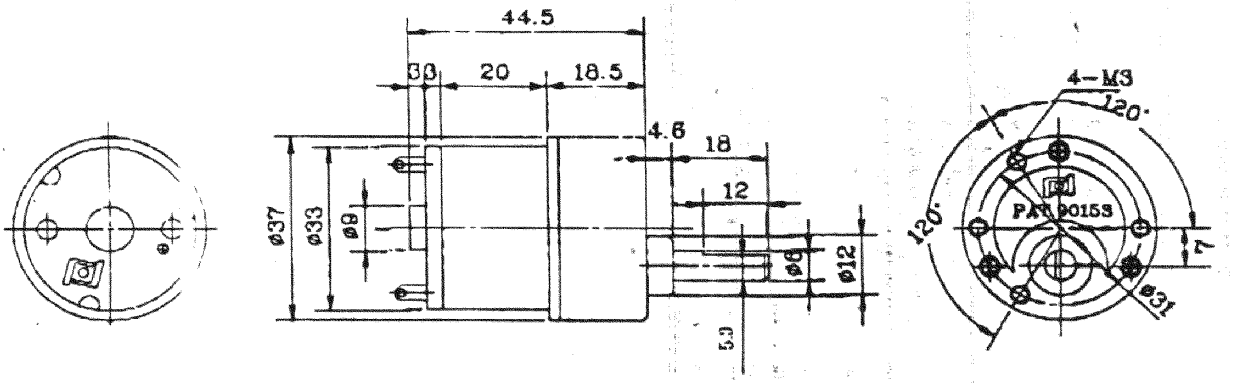

Jameco Part Number 176014

II. GEAR RATIO : 6:1

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
RATIO	6	10	18	30	50	60	75	90	100	150	180	300	500	810	900	1000	1500	3000
DIM "L" MM	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	24	24	24	24	24	24	24	26	26
EFF %	81	81	73	73	66	66	66	66	66	59	59	59	59	53	53	53	48	48
ALLOWABLE TORQUE kg-cm	0.7	0.7	1.0	1.3	2.3	3	4	4	5	6	6	6	6	6	6	6	6	6

SPECIFICATION SHEET

TYPE: HN-GH35 MB TYPE
MODEL: HN-GH 4-1640Y
CUSTOMER PAI T NO.:

III. SPECIFICATI ONS:

1. RATED VOLT .GE: 24V

2. DC VOLTAGE OPERATING RANGE: DC 12-24V

3. TORQUE (LOA D) AT MAXIMUN EFFICIENCY : 1.50 Kg-cm

5. NO LOAD SPE ED : 116 RPM +/-10%

6. SPEED AT MA XIUM EFFICIENCY (UNDER LOAD AT 1.50 Kg-cm) : 88RPM +/- 10%

7. NO LOAD CUR RENT: MAX. 140 mA

8. CURRENT AT MAX. EFFICIENCY(UNDER LOAD AT 1.50 Kg-cm) : MAX 340 mA

9. SHAFT END PL AY : MAX. 0.8 m/m

10. INSULATION RESISTANCE : 10M OHM

11. DIELECTRIC STRENGTH: 300V DC

12. GEAR RATIO 50.1